


10 GA. CAPACITY

6135 SERIES

STANDARD FEATURES

- Shear capacity up to 80,000 tensile and 44,000 yield strength.
- Pendant control c/w on/off buttons, mode selector switch, and stroke control dial.
- Backgauge control includes LED display, inch or metric conversion, go-to-position function, 99 pre-select programs, hour meter and stroke counter.
- 36" backgauge travel with automatic swing up backstop at full extension.
- 4-edged blades, top and bottom, modified high carbon, high chrome.
- 3 position footswitch control.
- 4' squaring arm c/w steel rule with 1/16" and 1 mm increments.
- Shadow light and line.
- Hand slots in table.
- Drilled and tapped holes in front of table.

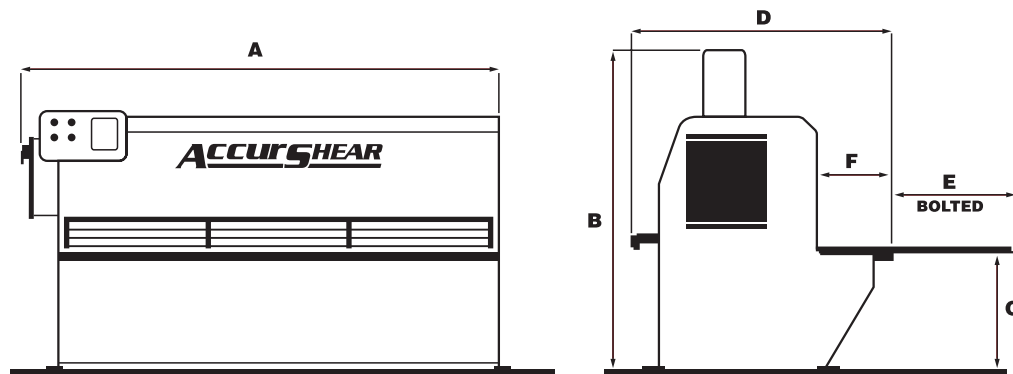

| Model Number | Capacity Inches | Length Feet | Knife Size Inches | Number Of Hold Downs | Hold-down Tonnage | Cycles Per minute Full Stroke | Cycles Per minute Short Stroke | High Speed Full Stroke | High Speed Short Stroke | Motor H.P. | Overall Dimensions | | | | | | Approx. Weight Lbs. |
|--------------|-----------------|-------------|-------------------|----------------------|-------------------|-------------------------------|--------------------------------|------------------------|-------------------------|------------|--------------------|----|----|----|----|----|---------------------|
| | | | | | | | | | | | A | B | C | D | E | F | |
| 61356 | 10 ga | 6 | 1x3x76 | 10 | 10 | 40 | 65 | n/a | n/a | 10 | 98 | 80 | 32 | 81 | 25 | 18 | 9,000 |
| 61358 | 10 ga | 8 | 1x3x100 | 13 | 13 | 35 | 60 | n/a | n/a | 10 | 122 | 80 | 32 | 83 | 23 | 20 | 11,000 |
| 613510 | 10 ga | 10 | 1x3x124 | 16 | 16 | 30 | 55 | n/a | n/a | 10 | 146 | 80 | 32 | 84 | 22 | 21 | 14,000 |
| 613512 | 10 ga | 12 | 1x3x148 | 19 | 19 | 25 | 45 | n/a | n/a | 10 | 170 | 80 | 32 | 86 | 21 | 22 | 17,000 |
| 613514 | 10 ga | 14 | 1x3x172 | 22 | 22 | 20 | 40 | n/a | n/a | 10 | 193 | 80 | 32 | 88 | 18 | 24 | 20,000 |


Specifications are subject to change without notice. Capacities are based on 80,000 tensile/44,000 yield strength steel.

1/4" CAPACITY

6250 SERIES

STANDARD FEATURES

- Shear capacity up to 80,000 tensile and 44,000 yield strength.
- Pendant control c/w on/off buttons, mode selector switch, and stroke control dial.
- Backgauge control includes LED display, inch or metric conversion, go-to-position function, 99 pre-select programs, hour meter and stroke counter.
- 36" backgauge travel with automatic swing up backstop at full extension.
- 4-edged blades, top and bottom, modified high carbon, high chrome.
- 3 position footswitch control.
- 4' squaring arm c/w steel rule with 1/16" and 1 mm increments.
- Manual quick blade clearance adjustment.
- Hand slots in table.
- T-slot in front of table.
- Shadow light and line.
- Oil cooler.

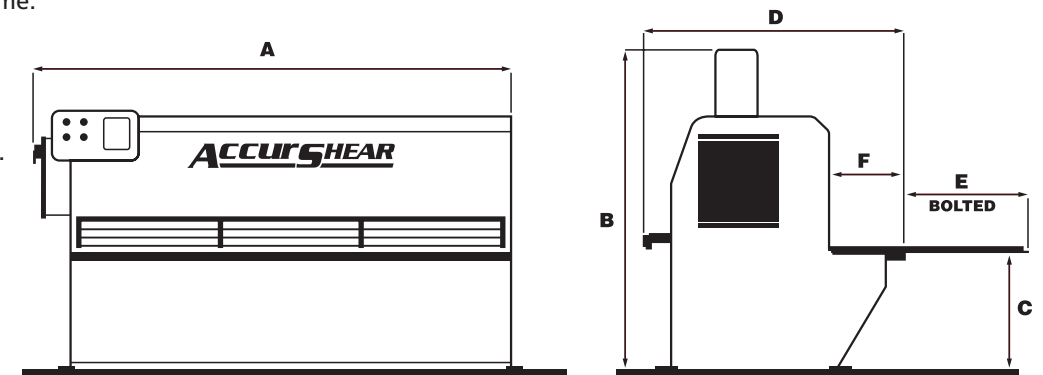

| Model Number | Capacity Inches | Length Feet | Knife Size Inches | Number Of Hold Downs | Hold-down Tonnage | Cycles Per minute Full Stroke | Cycles Per minute Short Stroke | High Speed Full Stroke | High Speed Short Stroke | Motor H.P. | Overall Dimensions | | | | | | Approx. Weight Lbs. |
|--------------|-----------------|-------------|-------------------|----------------------|-------------------|-------------------------------|--------------------------------|------------------------|-------------------------|------------|--------------------|----|----|----|----|----|---------------------|
| | | | | | | | | | | | A | B | C | D | E | F | |
| 62506 | 1/4 | 6 | 1x3x76 | 10 | 10 | 30 | 55 | 46 | 65 | 20 | 99 | 83 | 32 | 82 | 25 | 18 | 11,000 |
| 62508 | 1/4 | 8 | 1x3x100 | 13 | 13 | 26 | 50 | 42 | 65 | 20 | 123 | 83 | 32 | 84 | 23 | 20 | 14,000 |
| 625010 | 1/4 | 10 | 1x3x124 | 16 | 16 | 23 | 48 | 38 | 60 | 20 | 147 | 83 | 32 | 85 | 21 | 22 | 17,000 |
| 625012 | 1/4 | 12 | 1x3x148 | 19 | 19 | 20 | 46 | 32 | 60 | 20 | 171 | 83 | 32 | 87 | 20 | 23 | 21,000 |
| 625014 | 1/4 | 14 | 1x3x172 | 22 | 22 | 17 | 42 | 26 | 55 | 20 | 195 | 89 | 33 | 90 | 18 | 25 | 32,000 |
| 625016 | 1/4 | 16 | 1x3x196 | 25 | 25 | 14 | 38 | 21 | 55 | 20 | 219 | 89 | 33 | 92 | 15 | 28 | 38,000 |
| 625018 | 1/4 | 18 | 1x3x220 | 28 | 28 | 13 | 34 | 19 | 55 | 20 | 243 | 94 | 33 | 94 | 13 | 30 | 48,000 |
| 625020 | 1/4 | 20 | 1x3x244 | 31 | 31 | 12 | 30 | 17 | 50 | 20 | 267 | 94 | 33 | 96 | 11 | 32 | 57,000 |

Specifications are subject to change without notice. Capacities are based on 80,000 tensile/44,000 yield strength steel.